




PERISTALTIC PUMPS

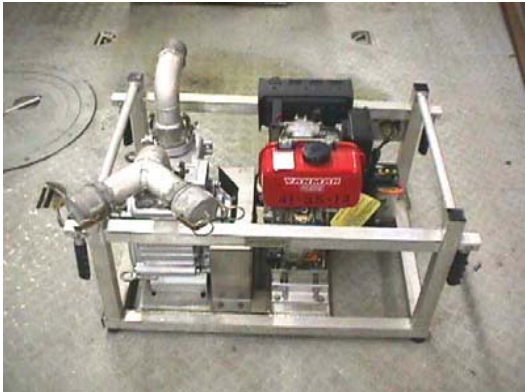

Inventory

	Great Lakes	Québec	Atlantic	Total
3 inch	-	-	-	-
2 inch	1	4	3	8
Total	1	4	3	8

Application

Suitable for the recovery and transfer of oil, water and oily water mixture, including viscous mixture. Can also be used during shoreline treatment operation (i.e. water washing or flushing).

Description

Gasoline driven pumps, equipped with camlock connection.

Operating Data

Maximum pressure: up to 2.5 bar (35 psi)
Flow rate: up to 27 m³ / hr (100 gpm)

Ancillaries

Suction hose
Discharge hose

Technical Data

Pipe connection: 5 cm (2 in)
Length: 0.9 m (3 ft)
Width: 0.6 m (1 ft 11 in)
Height: 0.5 m (1 ft 9 in)
Weight: 85 kg (187 lbs)

ECRC~SIMEC
Suite 1201, 275 Slater Street, Ottawa K1P 5H9
Phone (613) 230-7369 Fax (613) 230-7344
Web: www.ecrc.ca