



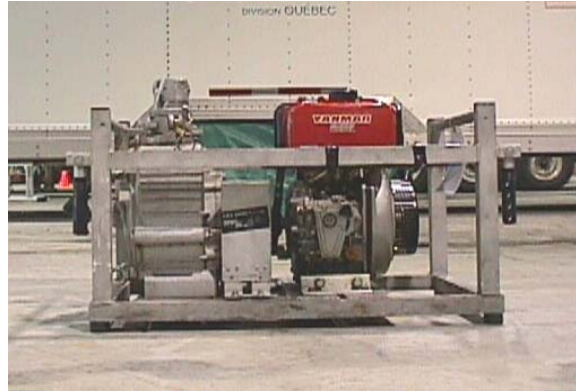

# PERISTALTIC PUMPS

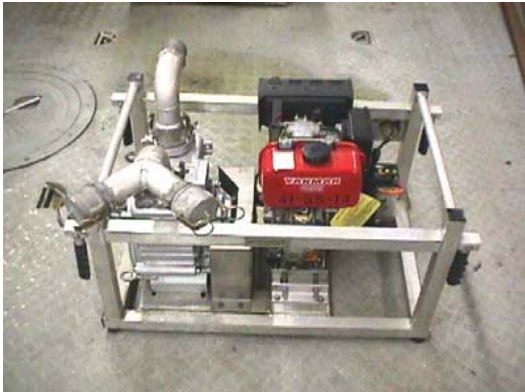

## Inventory

	Great Lakes	Québec	Atlantic	Total
3 inch	-	-	-	-
2 inch	1	4	3	8
<b>Total</b>	<b>1</b>	<b>4</b>	<b>3</b>	<b>8</b>

## Application

Suitable for the recovery and transfer of oil, water and oily water mixture, including viscous mixture. Can also be used during shoreline treatment operation (i.e. water washing or flushing).

## Description

Gasoline driven pumps, equipped with camlock connection.

## Operating Data

Maximum pressure: up to 2.5 bar (35 psi)  
Flow rate: up to 27 m<sup>3</sup> / hr (100 gpm)

## Ancillaries

Suction hose  
Discharge hose

## Technical Data

Pipe connection: 5 cm (2 in)  
Length: 0.9 m (3 ft)  
Width: 0.6 m (1 ft 11 in)  
Height: 0.5 m (1 ft 9 in)  
Weight: 85 kg (187 lbs)

ECRC~SIMEC  
Suite 1201, 275 Slater Street, Ottawa K1P 5H9  
Phone (613) 230-7369 Fax (613) 230-7344  
Web: [www.ecrc.ca](http://www.ecrc.ca)